


## LOADING 80kN EDA



**NOTES:-**

1. The curves give minimum cover required above the sub-grade. Allowance must be made for loss of material through penetration into soft subgrades and construction tolerances.
2. If subgrade CBR exceeds 25 it should be taken as 25.
3. The material requirements shown are minimum requirements and greater depths of higher quality materials may be used if economical to do so, however the total depth shall not be reduced.
4. The minimum pavement depth for roads shall be 250mm.

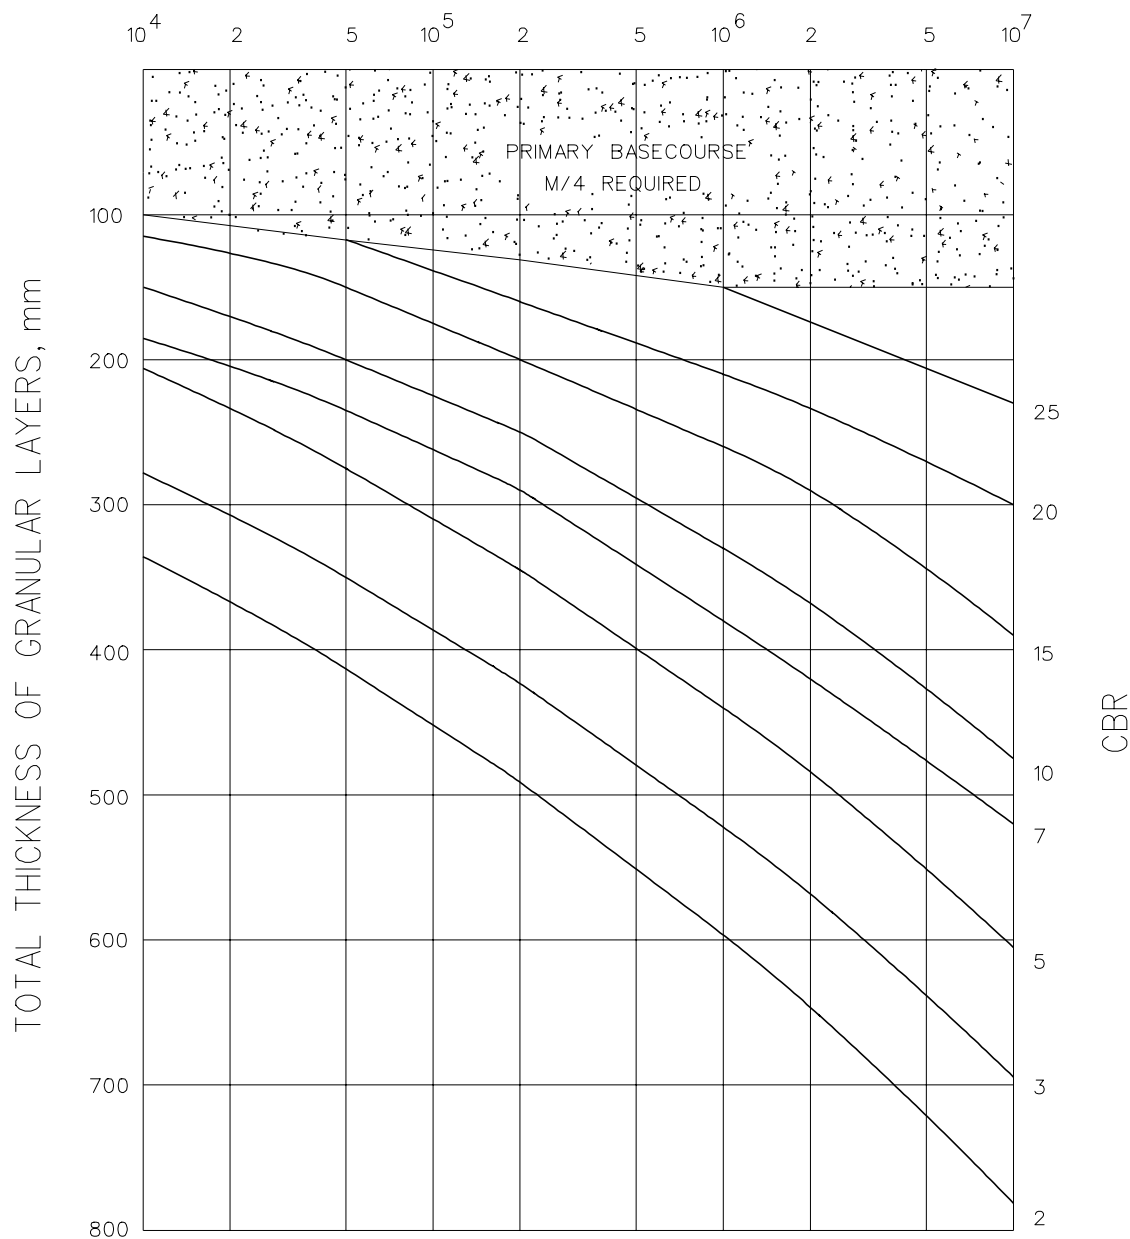

Head Office: 50 Centreway Road, Orewa  
 Private Bag 500, Orewa, 1461, New Zealand  
 Tel: 0800 4265169, Fax (09) 4267280  
 Email: info@rodney.govt.nz

26 February 2009

STANDARD DETAIL:

### DESIGN CHART FOR FLEXIBLE PAVEMENTS

Copyright on this Drawing is Reserved

DATE: June 2005

NOT TO SCALE

RDC NO:

SHEET NO:

REV:

18000

3.3